


Classico Commercial Downlights

The traditional look with the performance & efficiency of LED



Classico Commercial Downlights

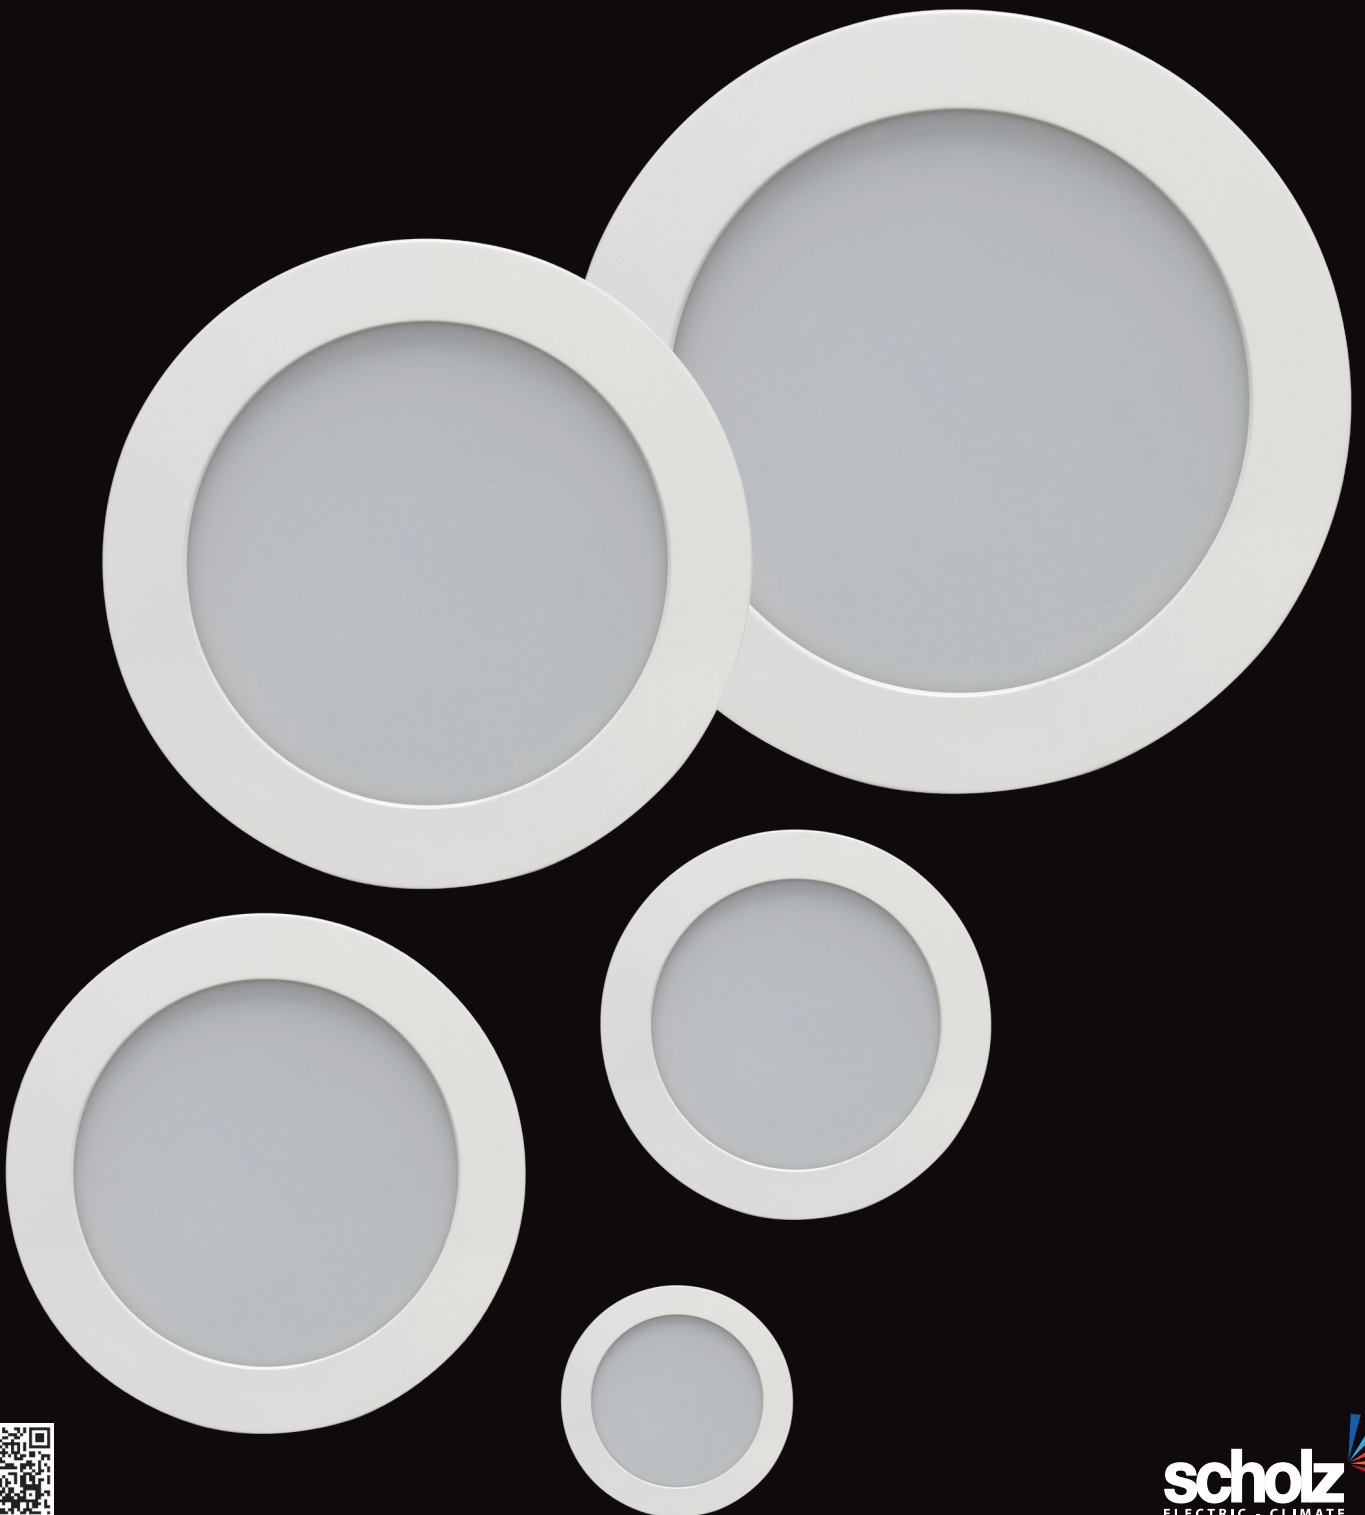

Product Features

- High performance – up to 2700Lm effective output
- Full range of cut out sizes up to 250mm
- Full range of alternatives for PLC and Metal Halide
- Frosted lens design provides excellent usable light with low glare
- Fixed 110° Beam Angle
- High colour rendering. In excess of CRI:80
- Economical SMT design
- Energy savings up to 50% (compared to equivalent PLC)
- Optimal Thermal Design ensures longer life
- Average life projection 50,000 hours at LM70
- Dimmable – Lumex LoadSmart recommended
- Flex and plug or direct connection
- Seven Year warranty

Available second quarter 2013

Classico M4

	(up to 900Lm) 12W	
Warm White (2700K)/White	800Lm	LL1CM4DFWW
Warm White (3000K)/White	800Lm	LL1CM4DFW3W
Natural White (4000K)/White	900Lm	LL1CM4DFNW
Cool White (5000K)/White	900Lm	LL1CM4DFCW

100mm cut-out. 130mm face.



Classico M6

	(up to 1350Lm) 18W	
Warm White (2700K)/White	1200Lm	LL1CM6DFWW
Warm White (3000K)/White	1200Lm	LL1CM6DFW3W
Natural White (4000K)/White	1350Lm	LL1CM6DFNW
Cool White (5000K)/White	1350Lm	LL1CM6DFCW

150mm cut-out. 180mm face.



Classico M8

	(up to 1900Lm) 25W	
Warm White (2700K)/White	1700Lm	LL1CM8DFWW
Warm White (3000K)/White	1700Lm	LL1CM8DFW3W
Natural White (4000K)/White	1900Lm	LL1CM8DFNW
Cool White (5000K)/White	1900Lm	LL1CM8DFCW

200mm cut-out. 245mm face.



Classico M10

	(up to 2700Lm) 35W	
Warm White (2700K)/White	2400Lm	LL1CM10DFWW
Warm White (3000K)/White	2400Lm	LL1CM10DFW3W
Natural White (4000K)/White	2700Lm	LL1CM10DFNW
Cool White (5000K)/White	2700Lm	LL1CM10DFCW

250mm cut-out. 280mm face.



IPART-ESS VEET-ESC

Contact customer service for the current accreditation status.
Technical data sheets and IES files available from our website.



1300 897 287
scholzgroup.com.au

Scholz Industries Pty Ltd
203 Princes Highway
Hallam Victoria 3803 Australia
Fax 1300 774 349